

The robust REM 4530 shaftless unwind stand handles massive rolls with a well proven and accepted floor pick-up system which allows for individual arm control while on the floor, and synchronous control while lifted. The entire unit shifts laterally on linear rails to allow for web guiding within a 6 inch (+/- 3") total travel.

4530

[adjustable shaftless pick-up]

Shaftless design

Floor Pick-up

Arms are center-aligned

Ball bearing shaft latches

Pneumatic disc brake


Constant unwind tension via load cell feed back

Bag-edge adjusting idler roll

Rolling base for use with automatic edge guide

Automatic edge guide with 6-inch total traverse



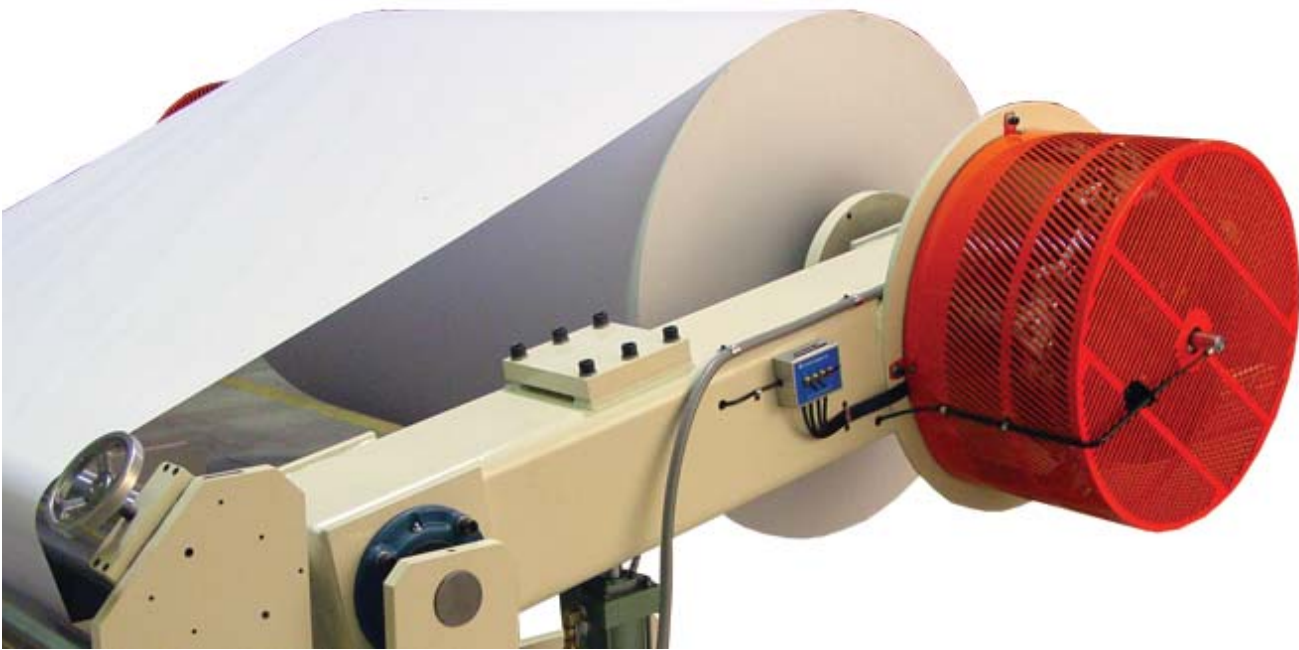

Diameters
48" | 60"

Web Widths
30 | 40 | 52 | 62 | 72 | 84"

Shaft Type:

- Core Chucks
- Cantilevered

Control System:

- Brake [Motor Optional]
- Point I/O
- 7" Touchscreen & Remote Control

Optional Accesories:

- Splice Tables
- Walkways

